
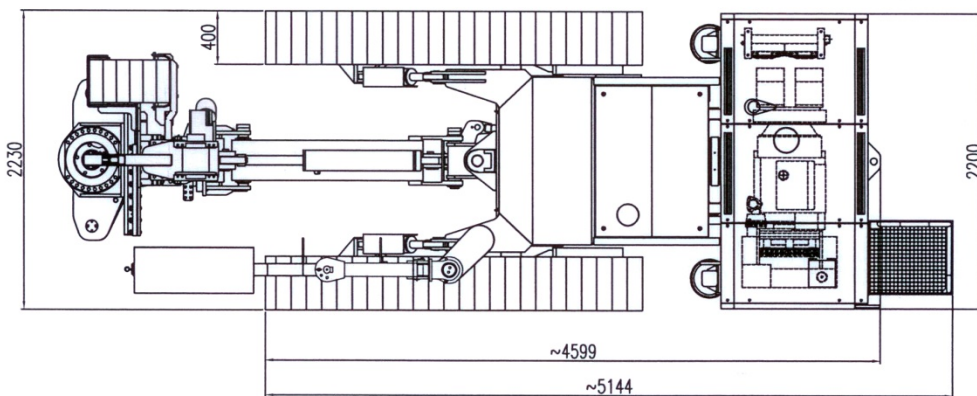


Service Weight	Approx. 11,000 kg					
Drive	Diesel Engine Power Rating = 85 kW (111 HP) @ 2,200 rpm					
Hydraulic System	Variable Load Sensing Pump + Gear Pump Max Pressure 250 Bar Q1 = 168 l/min. Q2 = 168 l/min. Q3 = 38 l/min. Q4 = 11 l/min.					
Hydraulic Oil Tank	Capacity 320 l					
Fuel Tank	Capacity 170 l					
Mast And Feed Assembly	Mast Length	:	6,000 mm			
	Stroke Length	:	4,100 mm			
	Feed Force	:	5,580 kg			
	Pullback Force	:	8,000 kg			
	Feed Speed	:	1.00 m/s			
	Retract Speed	:	0.98 m/s			
Rotator (HR2400)			Stage 1	Stage 2	Stage 3	Stage 4
	Rotary Speed	:	27 rpm	53 rpm	42 rpm	83 rpm
	Torque	:	2,338 kgm	1,169 kgm	1,948 kgm	974 kgm
Winch	Lifting Force	:	2345 kg			
	Line Speed	:	23.4 m/min			
	Wire Size	:	Ø12mm			
	Drum Capacity	:	46 m			
Hydraulic Double Clamp	Model	:	MOD179A			
	Clamping Force	:	19,214 kg			
	Clamping Range	:	Ø50 to Ø273mm			
	Break-out Torque	:	3,074 kgm			
Crawler Undercarriage	Specific Ground Pressure	:	0.64 kg/cm ²			
	Max. Travelling Speed	:	0-2.2 km/h			
	Climbing Ability	:	20°			
Dimensions (while mast down to horizontal)	Length	:	6,804 mm			
	Width	:	2,230 mm			
	Height	:	2,970 mm			

Note : Specifications are subject to change without notice in accordance with HD Engineering's policy of continuing development.

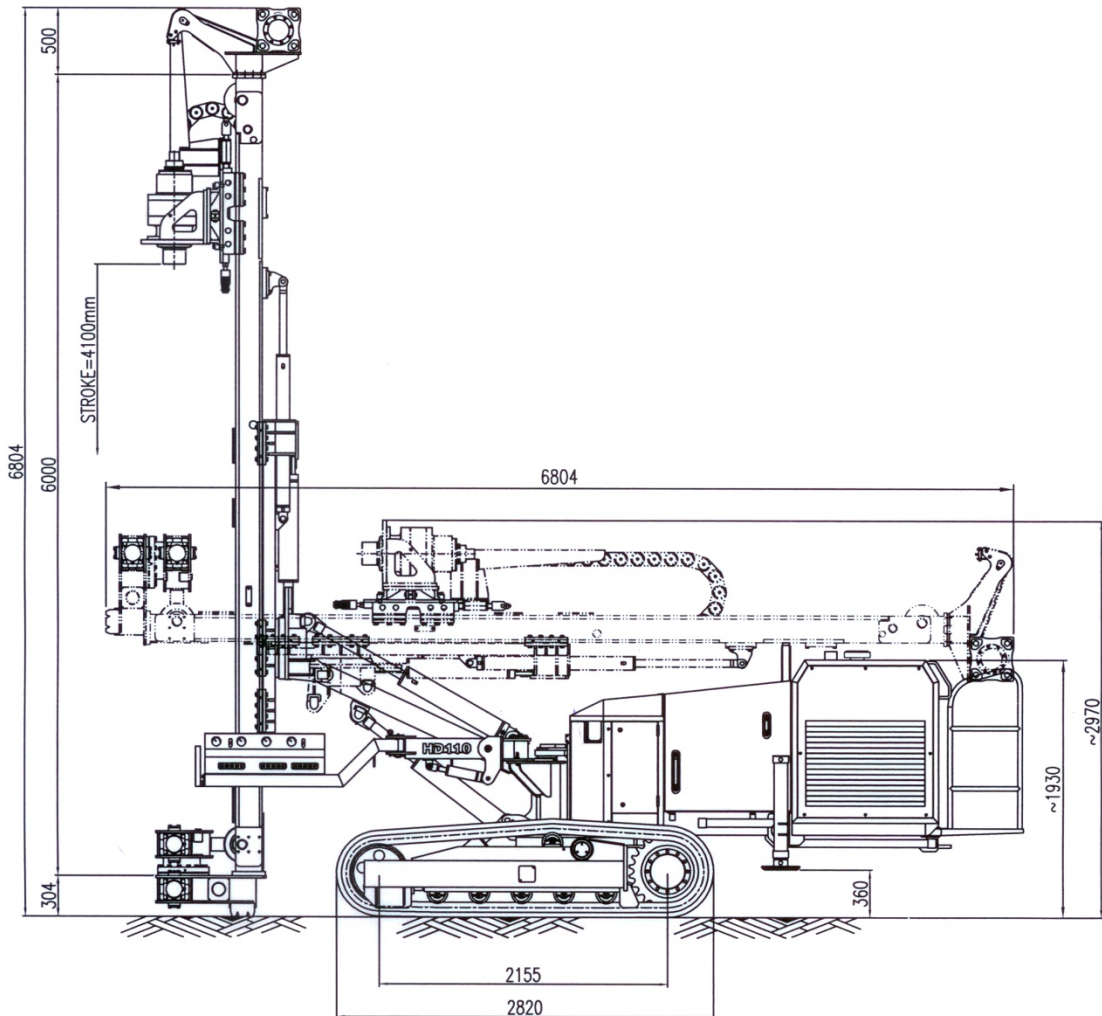

All Dimensions in mm